




Capacity up to 300 kg

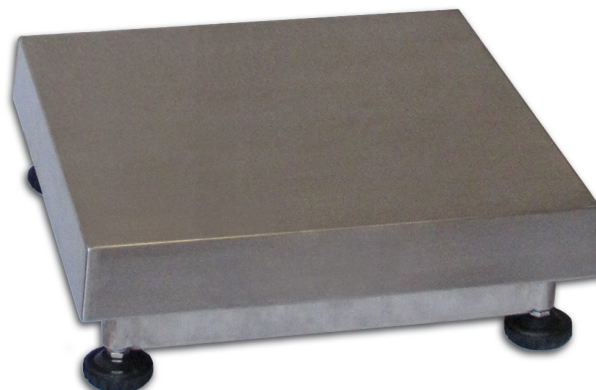

DESCRIPTION

- AISI 304 stainless steel tubular structure
- AISI 304 stainless steel loading top (laid)
- IP68 stainless steel load cell (IP69K on request)
- Stainless steel and polyamid feet
- Connection for indicator stand

CAPACITY	kg	ACCURACY CLASS C3		DIMENSION (mm)	NET WEIGHT (kg)	CODE
max. 15		•	•	400 x 400	11.5	AILN15
max. 30		•	•	400 x 400	11.5	AILN30
max. 60		•	•	400 x 400	13.3	AILN60
max. 150		•	•	400 x 400	13.3	AILN150
max. 200		•	•	600 x 600	24.5	AILN200
max. 300		•	•	600 x 600	24.5	AILN300

ON REQUEST

CERTIFICATIONS



OIML R60 C3

CERTIFICATIONS ON REQUEST



Declaration of conformity + IP69K marking protection rating
Water protection when cleaning high pressure / steam jet (Test: pressurized hot water is sprayed from a distance of 150 mm).
Water pressure 100 bar; temperature 80 ° C; test duration 250 seconds (Reference standard DIN 40050-9).



ATEX II 1GD (zone 0-1-2-20-21-22)




IECEx (zone 0-1-2-20-21-22)

AILN + WINOX-L

AISI 304 STAINLESS STEEL SINGLE CELL PLATFORMS


STAD

DIMENSIONS (mm)

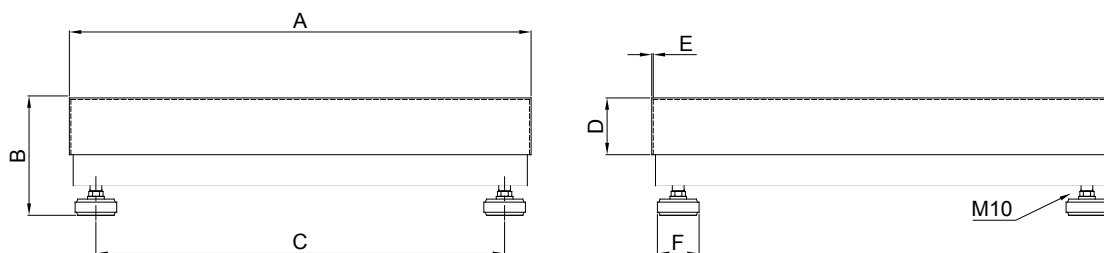


Code	Load cells capacities	Platforms	A	B	C	D	E	F	Gross Weight
AILN15 / 30	20 / 50 kg	400 x 400 mm	400	130	337	52	1	56	11.5 kg
AILN60 / 150	100 / 200 kg	400 x 400 mm	400	150	337	52	1	56	13.3 kg
AILN200 / 300	300 / 500 kg	600 x 600 mm	600	150	537	77	1.5	56	24.5 kg

ELECTRICAL CONNECTIONS

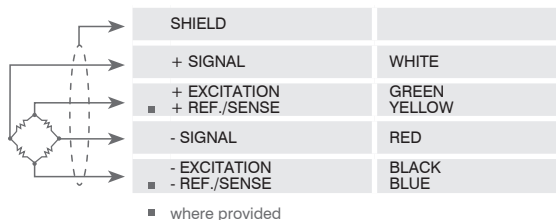

OPTIONS ON REQUEST

DESCRIPTION	CODE
 <p>Indicator stainless steel support column (Ø 38 mm, h 700 mm) Stainless steel bracket for platform mounting.</p>	COLONNAM + STAFFAIN

The Company reserves the right to make changes to the technical data, drawings and images without notice.