


P1250 - P1200x1500 - P1500

PAINTED STEEL PLATFORMS WITH FOUR IP68 LOAD CELLS

STAD



Capacity up to 3000 kg

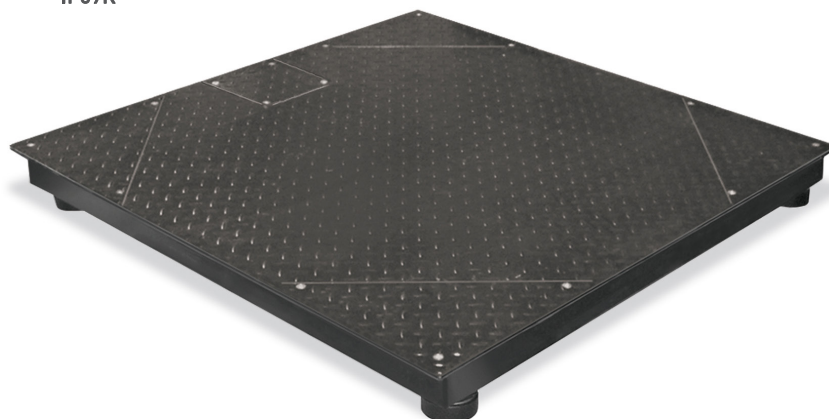

DESCRIPTION

- Painted steel platform with inspectable loading top on cells and junction box sides.
- 4 IP68 AISI 420 stainless steel shear beam load cell. 1000 kg capacity. OIML R60 C3 accuracy class (IP69K protection on request)
- IP67 stainless steel junction box with equalization board and 6-output wires cable (5 m length).
- Galvanized steel self-centering adjustable jointed feet.
- Two M12 holes for lifting.
- **On request:** CUSTOM platforms with non-standard dimensions up to 2500x2500 mm and capacities up to 6000 kg.



CAPACITY	kg	ACCURACY CLASS C3	 	DIMENSION (mm)	WEIGHT (kg)	CODE
max. 3000		•	•	1250 x 1250	110	P1250
max. 3000		•	•	1200 x 1500	112	P1200x1500
max. 3000		•	•	1500 x 1500	148	P1500


ON REQUEST

CERTIFICATIONS



OIML R60 C3

CERTIFICATIONS ON REQUEST



Declaration of conformity + IP69K marking protection rating

Water protection when cleaning high pressure / steam jet (Test: pressurized hot water is sprayed from a distance of 150 mm).
Water pressure 100 bar; temperature 80 ° C; test duration 250 seconds (Reference standard DIN 40050-9).



ATEX II 1GD (zone 0-1-2-20-21-22)





IECEx (zone 0-1-2-20-21-22)

P1250 - P1200x1500 - P1500

PAINTED STEEL PLATFORMS WITH FOUR IP68 LOAD CELLS

STAD



DIMENSIONS (mm)

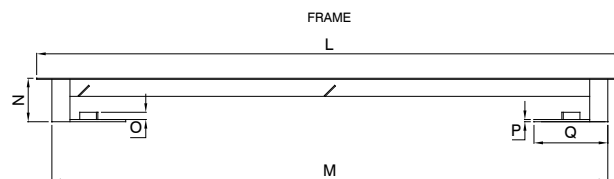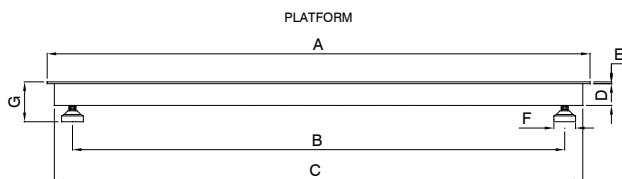


Code	Load Cells capacities	Platforms A	B	C	D	E	F	G	Gross Weight
P1250	1000 kg	1250 x 1250	1115	1210	60	5	60	90	110 kg
P1200P1500	1000 kg	1200 x 1500	1065 x 1370	1160 x 1460	60	5	60	÷	112 kg
P1500	1000 kg	1500 x 1500	1370	1460	60	5	60	105	148 kg

Code	L	M	N	O	P	Q	Gross Weight
TELP1250	1370 x 1370	1270 x 1270	105	20	8	204	30 kg
TELP1200P1500	1620 x 1320	1520 x 1220	105	20	8	204	33 kg
TELP1500	1620 x 1620	1536 x 1536	117	20	8	204	36 kg

ELECTRICAL CONNECTIONS

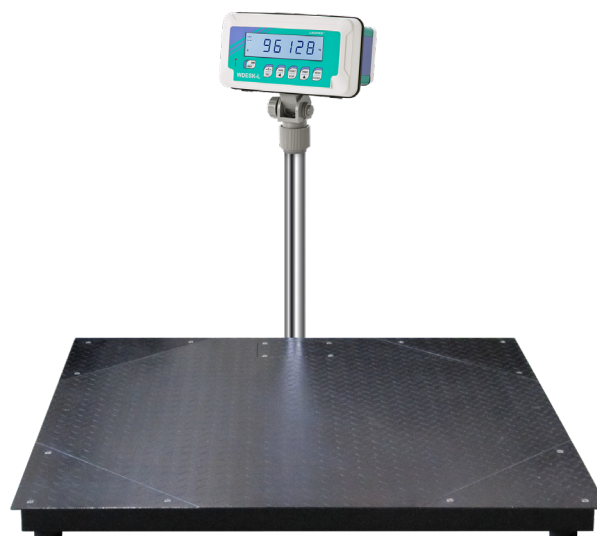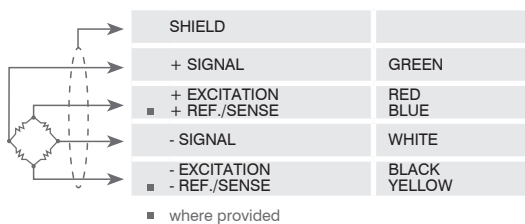

OPTIONS ON REQUEST

DESCRIPTION	CODE
 Galvanized steel pit frame with center adjusting brackets. For platforms: 1250x1250 mm 1200x1500 mm 1500x1500 mm	TELP1250 TELP1200P1500 TELP1500
 Painted steel access ramp. Dimensions: 1250x1060xh110mm 1500x1060xh110mm	P1250RAMP P1500RAMP
 Indicator stainless steel support column (Ø 38 mm, h 700 mm) Steel bracket complete with wheels..	MOBILCOLONNA
 AISI 304 stainless steel plates for constraint against lateral forces and anti-tilt. For self-centring joint foot.	PPV

The Company reserves the right to make changes to the technical data, drawings and images without notice.